Typical Wallas Dt heater installation (closet).

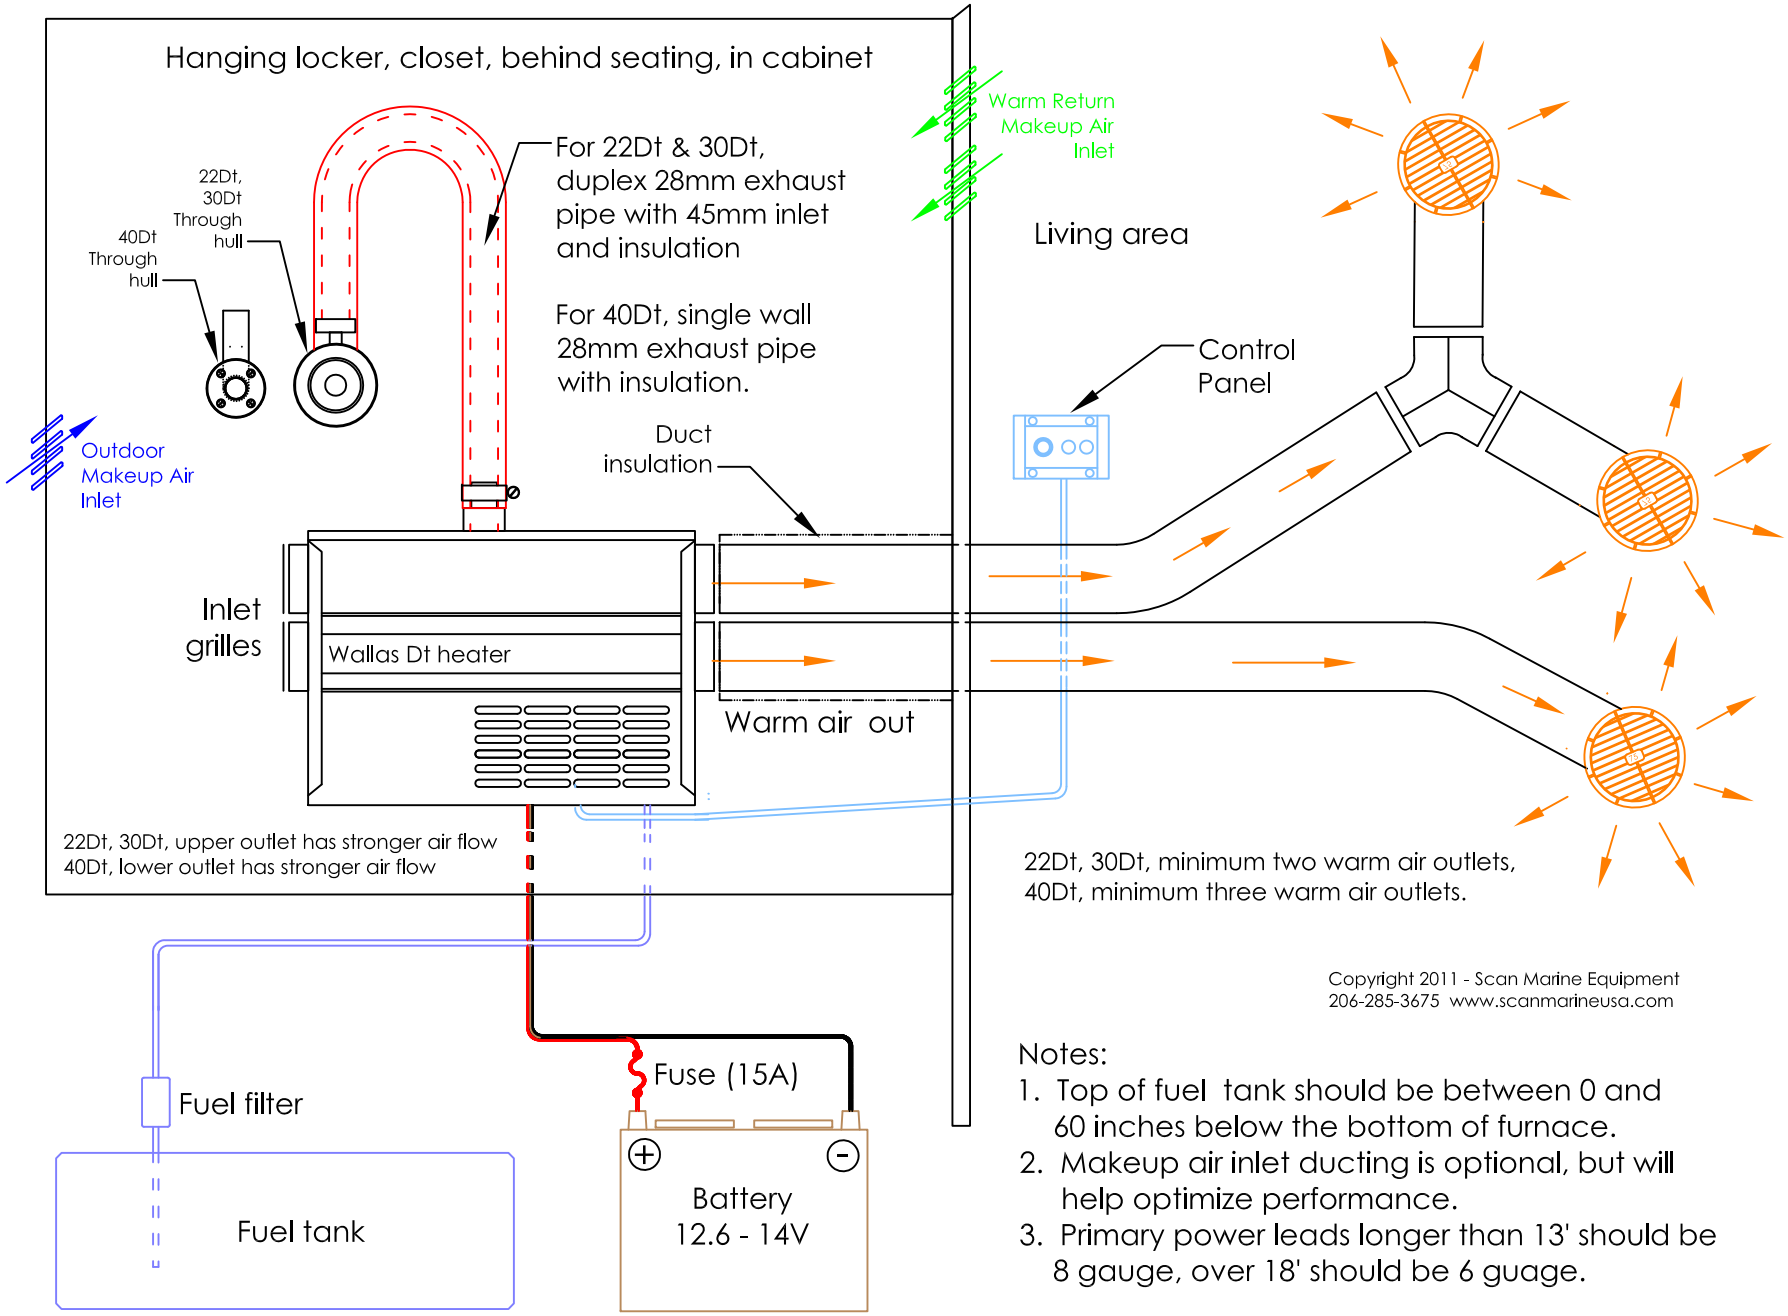

Copyright 2011 - Scan Marine Equipment
206-285-3675 www.scanmarineusa.com

Notes:

1. Top of fuel tank should be between 0 and 60 inches below the bottom of furnace.
2. Makeup air inlet ducting is optional, but will help optimize performance.
3. Primary power leads longer than 13' should be 8 gauge, over 18' should be 6 guage.